



### FEATURES

- Ø6.35mm mounting
- Black anodised aluminium housing
- Sealed to IP67 - weatherproof
- Wide viewing angle - smoked lens
- Internal potting
- Range of LED colour options
- Range of voltage options

### BENEFITS

- Standard industrial mounting size
- Suitable for portable equipment
- Suitable for external applications
- Smoked lens gives good on/off contrast ratio
- Suitable for high vibration applications
- Suitable for status panel indication
- Manufactured with internal resistor
- Outstanding reliability
- Vandal resistant

| Marl Part Number | LED Colour                   | Typical Voltage DC Vopr | Max. Reverse Voltage | Typical Current DC Iopr | Typical LED Luminous Intensity | Typical LED Wavelength λp | Operating Temp Topr * | Storage Temp Tstg |
|------------------|------------------------------|-------------------------|----------------------|-------------------------|--------------------------------|---------------------------|-----------------------|-------------------|
| 612-301-04       | Red                          | 1.85 **                 | 3                    | 20                      | 33                             | 660                       | -40 to +85            | -40 to +85        |
| 612-325-04       | Yellow                       | 2.0 **                  | 3                    | 20                      | 401                            | 590                       | -40 to +85            | -40 to +85        |
| 612-324-04       | Green                        | 3.2 **                  | 3                    | 20                      | 1010                           | 525                       | -30 to +85            | -40 to +85        |
| 612-330-04       | Red/Green Bi-Colour          | 2.0/2.2 **              | 3                    | 20                      | 20                             | 627/565                   | -40 to +85            | -40 to +85        |
| 612-338-04-15    | Red/Green/Amber Tri-Colour † | 2.0/2.2 **              | 3                    | 20                      | 30/40                          | 627/565                   | -40 to +85            | -40 to +85        |
| 612-934-04       | Blue                         | 3.2 **                  | 3                    | 20                      | 225                            | 465                       | -30 to +85            | -40 to +85        |
| 612-998-04       | Cool White                   | 3.2 **                  | 3                    | 20                      | 1194                           | See Below                 | -30 to +85            | -40 to +85        |
| 612-301-20       | Red                          | 5-6                     | 75                   | 19                      | 33                             | 660                       | -40 to +85            | -40 to +85        |
| 612-325-20       | Yellow                       | 5-6                     | 75                   | 18                      | 401                            | 590                       | -40 to +85            | -40 to +85        |
| 612-324-20       | Green                        | 5-6                     | 75                   | 16                      | 830                            | 525                       | -30 to +85            | -40 to +85        |
| 612-330-20       | Red/Green Bi-Colour          | 5-6                     | 75                   | 20                      | 20                             | 627/565                   | -40 to +85            | -40 to +85        |
| 612-934-20       | Blue                         | 5-6                     | 75                   | 20                      | 225                            | 465                       | -30 to +85            | -40 to +85        |
| 612-998-20       | Cool White                   | 5-6                     | 75                   | 16                      | 932                            | See Below                 | -30 to +85            | -40 to +85        |
| 612-301-21       | Red                          | 12                      | 75                   | 18                      | 33                             | 660                       | -40 to +85            | -40 to +85        |
| 612-325-21       | Yellow                       | 12                      | 75                   | 18                      | 401                            | 590                       | -40 to +85            | -40 to +85        |
| 612-324-21       | Green                        | 12                      | 75                   | 19                      | 1010                           | 525                       | -30 to +85            | -40 to +85        |
| 612-330-21       | Red/Green Bi-Colour          | 12                      | 75                   | 20                      | 20                             | 627/565                   | -40 to +85            | -40 to +85        |
| 612-934-21       | Blue                         | 12                      | 75                   | 19                      | 225                            | 465                       | -30 to +85            | -40 to +85        |
| 612-998-21       | Cool White                   | 12                      | 75                   | 18                      | 1194                           | See Below                 | -30 to +85            | -40 to +85        |
| 612-301-23       | Red                          | 24-28                   | 75                   | 17 @ 28V                | 27                             | 660                       | -40 to +85            | -40 to +85        |
| 612-325-23       | Yellow                       | 24-28                   | 75                   | 17 @ 28V                | 308                            | 590                       | -40 to +85            | -40 to +85        |
| 612-324-23       | Green                        | 24-28                   | 75                   | 16 @ 28V                | 830                            | 525                       | -30 to +85            | -40 to +85        |
| 612-330-23       | Red/Green Bi-Colour          | 24-28                   | 75                   | 17 @ 28V                | 20 @ 20mA                      | 627/565                   | -40 to +85            | -40 to +85        |
| 612-934-23       | Blue                         | 24-28                   | 75                   | 14 @ 28V                | 175                            | 465                       | -30 to +85            | -40 to +85        |
| 612-998-23       | Cool White                   | 24-28                   | 75                   | 14 @ 28V                | 932                            | See Below                 | -30 to +85            | -40 to +85        |
|                  |                              | Vdc                     | Vdc                  | mA                      | mcd                            | nm                        | °C                    | °C                |

| Typical Emission Colours Cool White LED |       |       |       |       |
|---|-------|-------|-------|-------|
| X                                       | 0.296 | 0.283 | 0.330 | 0.330 |
| Y                                       | 0.276 | 0.305 | 0.360 | 0.318 |

### OPTIONAL FLYING LEAD TERMINATORS

| Marl Part No Suffix | Wire Length | Wire Colour     | No/Diameter of Conductors | Diameter of Insulation | Wire Specification                      |
|---------------------|-------------|-----------------|---------------------------|------------------------|---|
| 612-301-04-15       | 150mm       | Red - Anode     | 19/0.16mm                 | 1.2mm                  | Type 44, 22 Gauge High Performance Wire |
| 612-301-04-19       | 1000mm      | Black - Cathode |                           |                        |   |

### NOTES

Intensities (Iv) and colour shades of white (X-Y co-ordinates) may vary between LEDs within a batch. Additional LED Colours, Voltage Options and Flying Lead lengths available for semi-custom projects. Please contact our Sales Team. All LED components are supplied in anti-static packaging.

† Tri-Colour model has 3x 150mm flying leads (Anode Red, Anode Green and Common Cathode). Amber is generated by powering Red and Green simultaneously.

\* LED Characteristics stated at Ta = 25°C. For operating temperature derating graphs, please refer to sheet 2.

\*\* These are Current models and the voltage shown is Vf at 20mA, not Vopr. Additionally, there is no reverse protection diode in Current models.

To order please contact IBS ELECTRONICS GROUP - [WWW.IBSELECTRONICS.COM](http://WWW.IBSELECTRONICS.COM)



# 612 SERIES PANEL INDICATOR LED

## TECHNICAL CHARACTERISTICS



| Series | Max. Power Dissipation | Panel Cutout | Nut Mounting Torque | Min. Mounting Centres | Min. - Max. Panel Thickness |
|--------|------------------------|--------------|---------------------|-----------------------|-----------------------------|
| 612    | 500                    | 6.35         | 0.6                 | 11.0                  | 1.5 - 7.0                   |
|        | mW                     | mm           | Nm                  | mm                    | mm                          |

## TECHNICAL DRAWING

Weight (g): 5

Dimensions in mm (typical). Not to scale. Mounting hole to be clean and burr free. Anode termination denoted by long pin.

Tri-colour model uses 3x 150mm flying leads instead of pins: Red = Red Anode, Green = Green Anode, Black = Common Cathode.

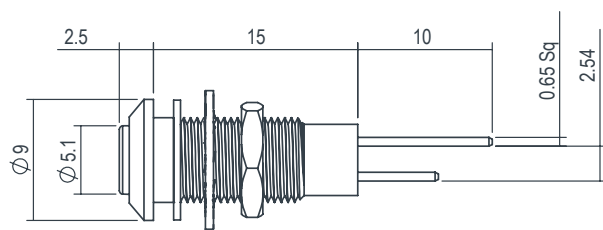






### PUSH ON CONNECTOR



909-000-00 is gold plated, 910-000-00 is tin plated - for use with 612 series lamps.

Dimensions in mm (typical). Not to scale.

## DE-RATING GRAPHS



## MATERIALS

|                   |                          |                      |                    |                    |                           |
|-------------------|--------------------------|----------------------|--------------------|--------------------|---------------------------|
| <b>Body</b>       | Black Anodised Aluminium | <b>Lens</b>          | Polycarbonate      | <b>Lock Washer</b> | Spring Steel              |
| <b>Nut</b>        | Nickel Plated Brass      | <b>Encapsulation</b> | Black Polyurethane | <b>Termination</b> | Silver Flash Coated Brass |
| <b>Panel Seal</b> | Viton                    |                      |                    |                    |                           |

## DESIGN CONSIDERATIONS

### Electro-Static Discharge (ESD)

Build up of electro-static discharge occurs in many situations involving people moving and handling products. The range of possible situations is very diverse but voltage levels as high as several thousand volts can and do arise in many individual situations. When an operator charged up to these levels handles a static sensitive device, there is a very probable likelihood that the device will be irreversibly damaged. It is essential that precautions are taken at all stages during manufacture and assembly of these products. Although LEDs were never considered to be static sensitive

devices, changes in manufacturing technology and materials used to produce higher intensity products over a large range of the wavelength spectrum have changed this. Marl has an approved system of ESD control from goods in, through production and into final packing and despatch. Marl recommend all users of LED based products follow the guidelines of BS 100015.

### Voltage, Current and Temperature

The forward voltage / current value of an LED is dependent upon the ambient temperature of the environment in which

it is operated. Therefore, care must be taken to operate the LED at the correct voltage / current values, depending upon the ambient temperature.

Marl should be contacted if the device is to be operated outside the temperature range specified. Marl accept no liability for any product that is operated outside the stated voltage or temperature range.

To order please contact IBS ELECTRONICS GROUP - [WWW.IBSELECTRONICS.COM](http://WWW.IBSELECTRONICS.COM)

marlleds marlinternationallimited company/marl-international-limited



Q 05480

DSN 612 Version DS003/2017. Page 2 of 2